



Delta II 7326

1/100 Scale Paper Model Instructions


NOTE: Delta II – 7326 has three boosters – These instructions will work for both the 10-foot and 9.5-foot fairing models.

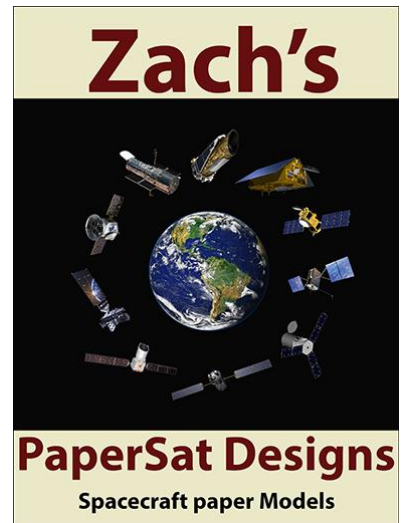

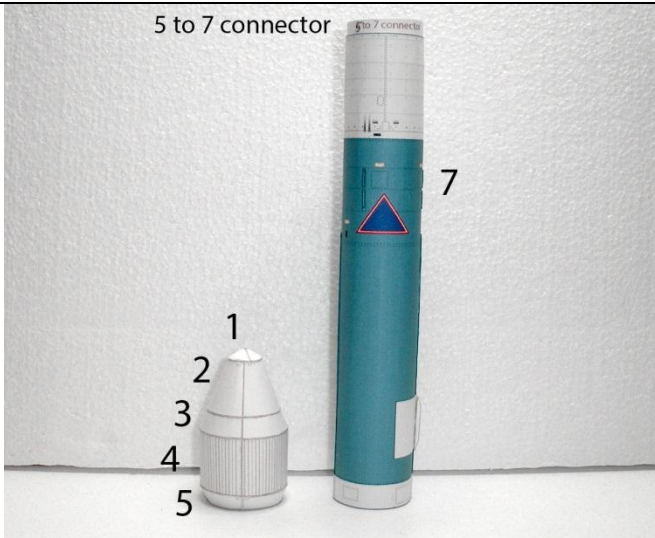


9.5-Foot Fairing:

Former fits inside up against the 5 to 7 connector

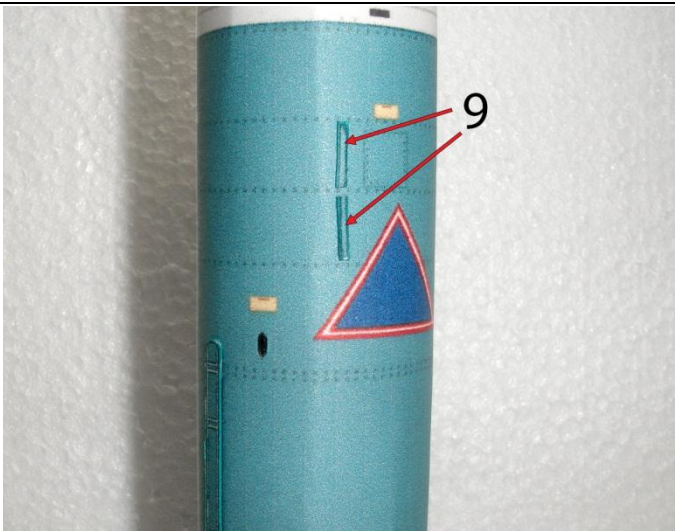


Glue 9 into the matching graphics near the top.

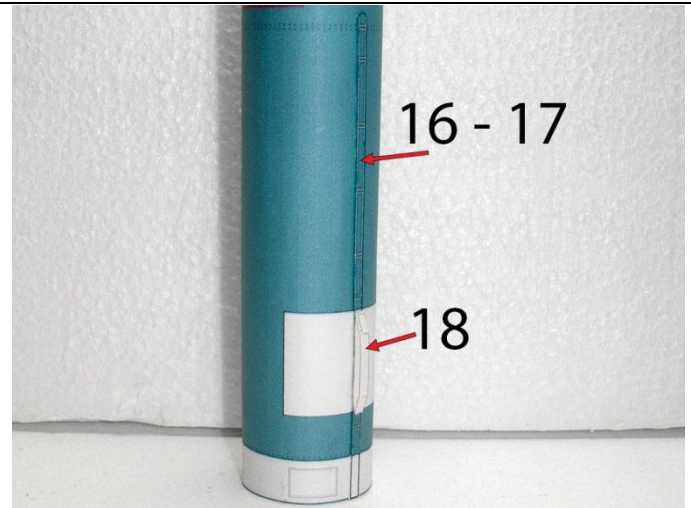

16 and 17 are glued onto the labeled areas, 18 is glued onto 17.




Glue the nose cone on top while matching the seems on the back. Set this to the side for a while.

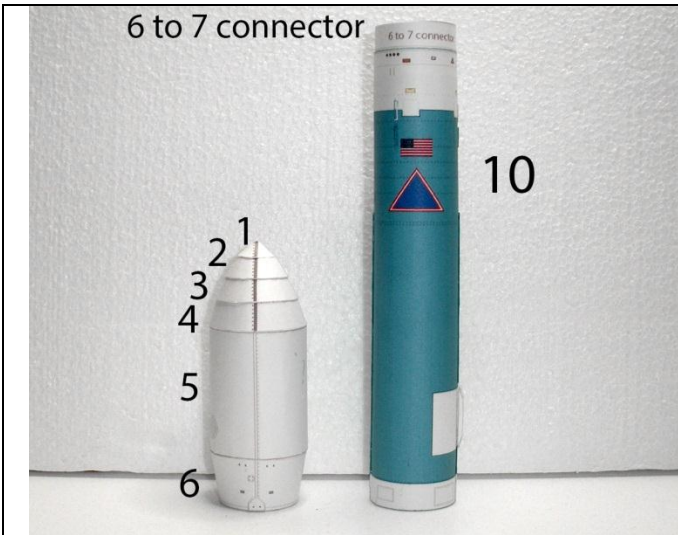


10-Foot Fairing:


Former fits inside up against the 6 to 7 connector

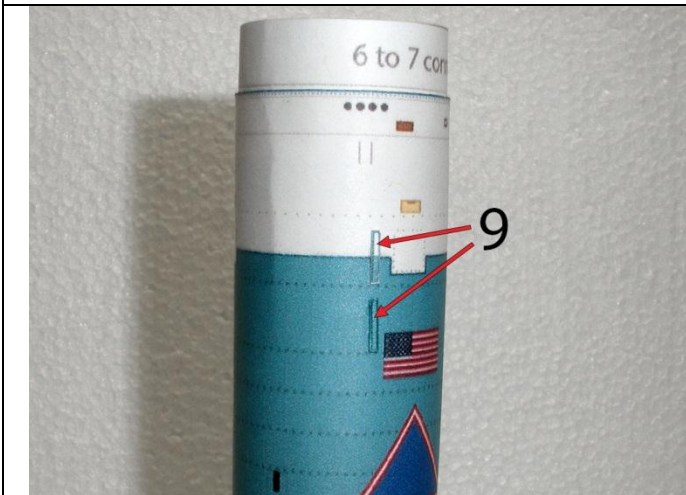

Glue 9 into the matching graphics near the top.

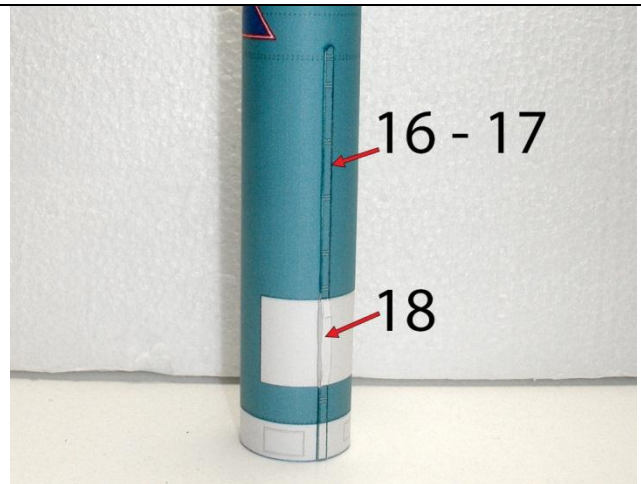

16 and 17 are glued onto the labeled areas, 18 is glued onto 17.

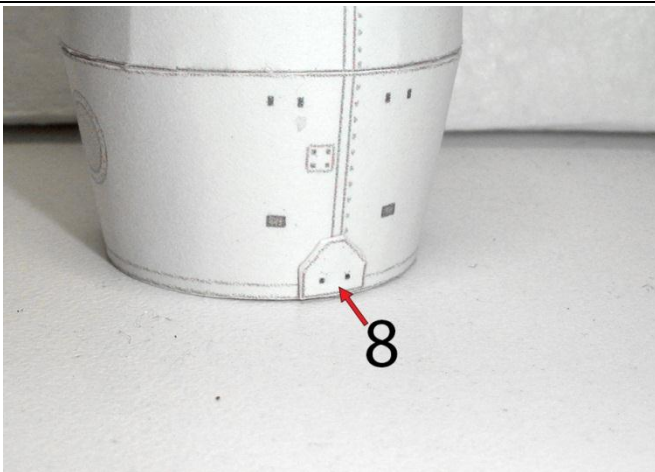

Glue onto both places at the bottom of the nose cone





Glue the nose cone on top while matching the seems on the back. Set this to the side for a while.


7 to 10 connector




Former fits inside up against the 7 to 10 connector

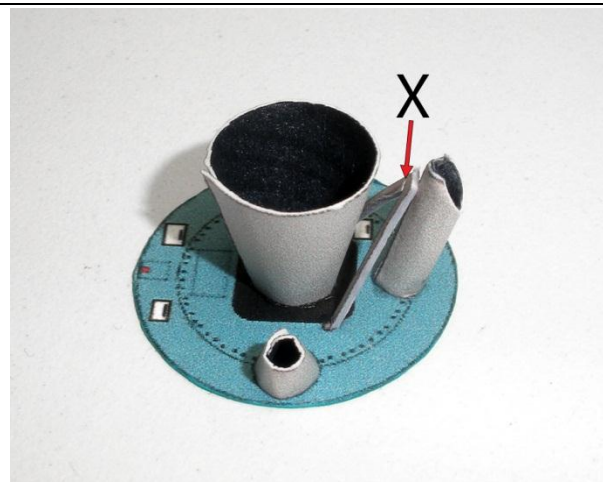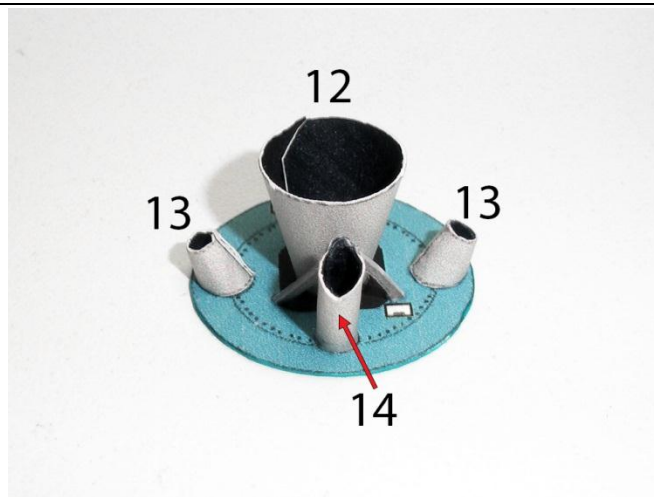


Bottom of X is glued onto the two small grey circles and the top is glued against part 14.

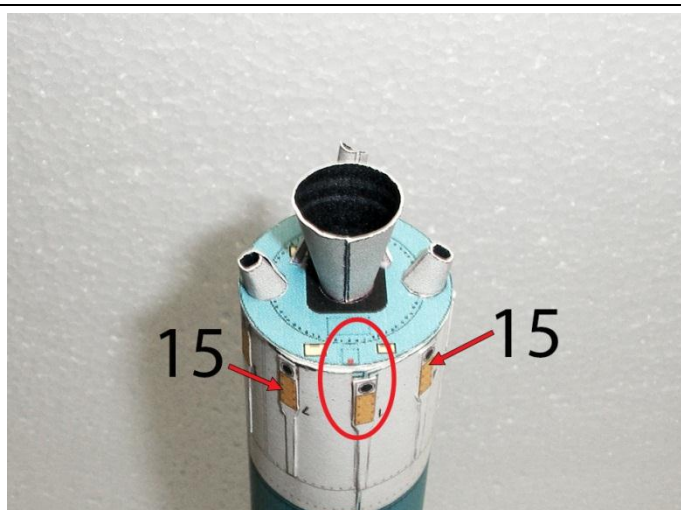


Match the red marker to the seem (area labeled 1).
Glue Part 15 to all 9 matching graphics on the bottom.

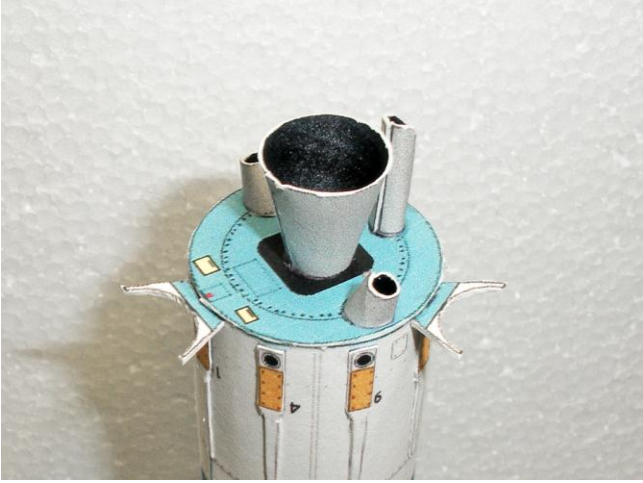


Glue Parts 22 onto the thick black lines on the areas labeled 1, 2 and 3 on the bottom.

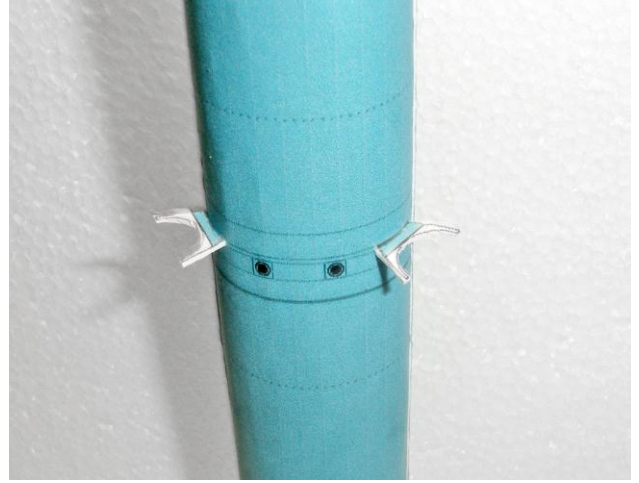


Glue the other three of parts 22 onto the thick black lines above the ones you did on the bottom.

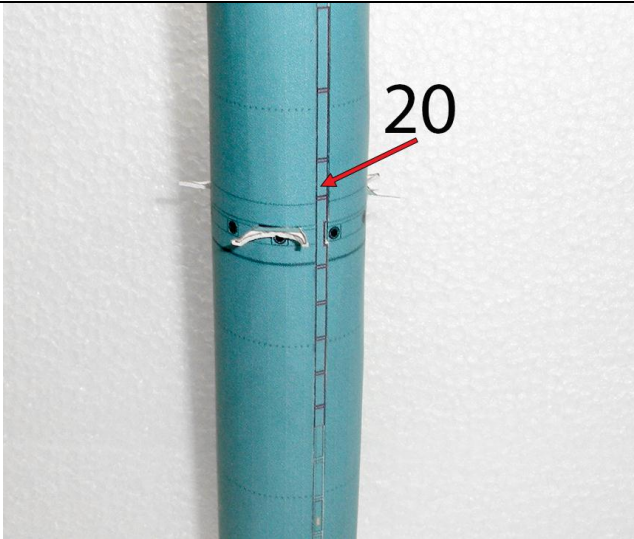


Glue 19 and 20 onto their labeled areas on the body

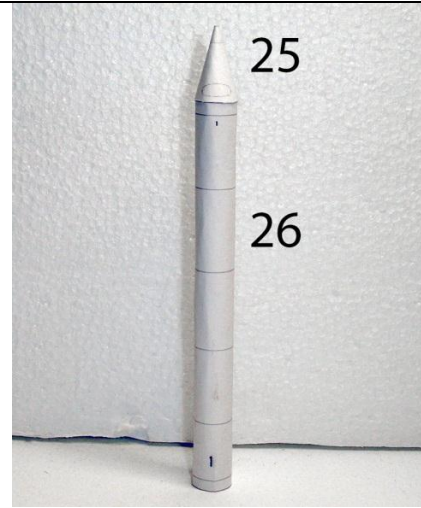

Boosters, Match the seem on 25 to the seem on the body. make three of these.

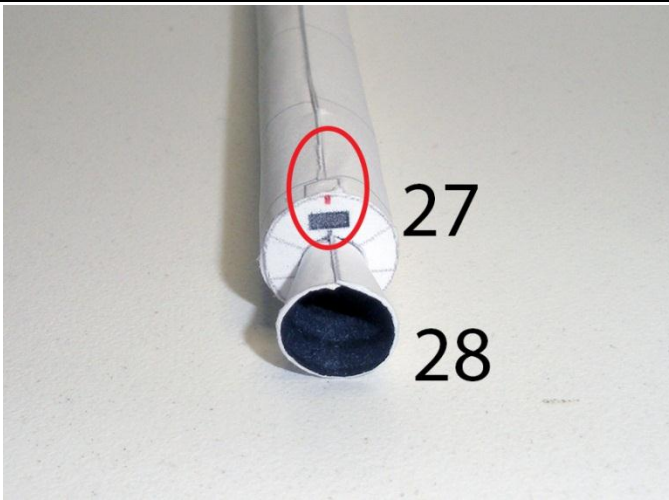


Match the seem on 28 to the grey marker on 27.
Match the seem on 27 to the seem on the body.

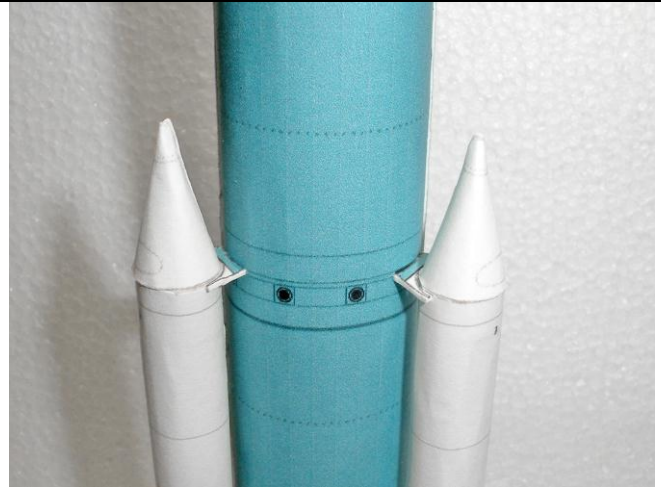

Glue the boosters onto the brackets (Parts 22). Match the numbers on the boosters to the numbers labeled on the bottom of the body. and the numbers printed on the boosters faces outward.



Bottom View

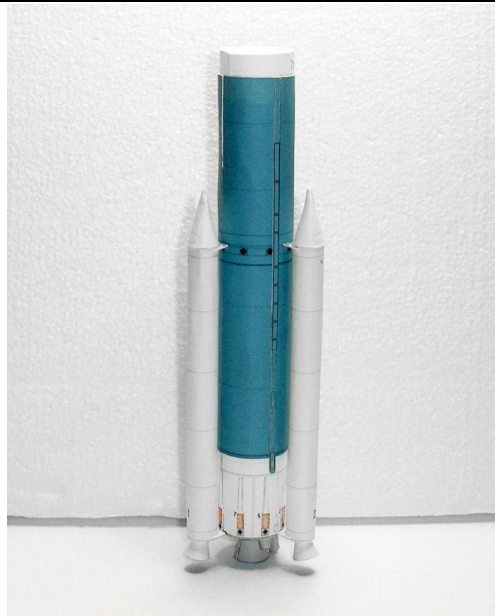

Glue the top half to the lower half, matching the seam on the backside – Your models are done.